


**DEFLECTION ROLLERS.**  
PRODUCT OVERVIEW ULR.

—  
JANUARY 2018



# Temco® Deflection Rollers ULR

## Deflection rollers figure

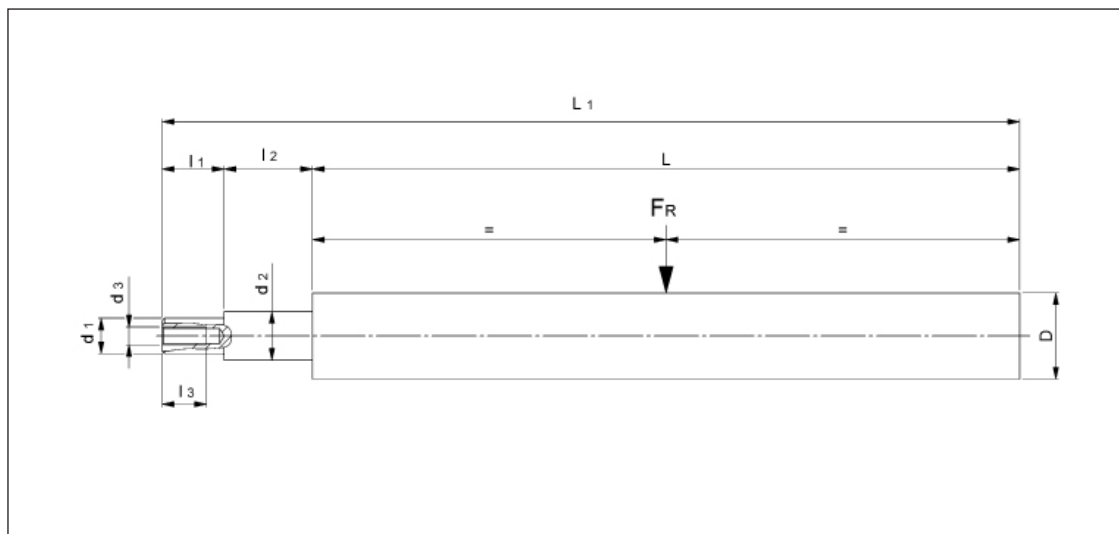

## Overview

Type	Shell		Material	Coat	Adaptor						Material	L <sub>1</sub> [mm]	v <sub>max</sub> [m/min]
	D [mm]	L [mm]			d <sub>1</sub> [mm]	l <sub>1</sub> [mm]	d <sub>2</sub> [mm]	l <sub>2</sub> [mm]	d <sub>3</sub> [mm]	l <sub>3</sub> [mm]			
ULR34250-06**	34	250	CFRP				Ø29.6	25.0	M8	20.0	Alu	275.0	750
ULR34250-07**	34	250	CFRP		M12	15.0	SW24	125.0			St.	390.0	750
ULR34250-08**	34	250	CFRP	XP 0198			Ø29.6	25.0	M8	20.0	Alu	275.0	750
ULR34250-09**	34	250	CFRP	XP 0198	M12	15.0	SW24	125.0			St.	390.0	750
ULR34250-10**	34	250	CFRP		Ø18.0	45.0	Ø21.0	-1.5	M8	20.0	Alu	293.5	750
ULR34250-11**	34	250	CFRP	XP 0198	Ø18.0	45.0	Ø21.0	-1.5	M8	20.0	Alu	293.5	750
ULR34250-15	34	250	CFRP		Ø18.0	75.0	Ø21.0	-1.5	M8	20.0	Alu	323.5	750
ULR34400-02**	34	400	CFRP		Ø18.0	45.0	Ø29.6	-1.5	M8	20.0	Alu	443.5	600
ULR34400-E-03	34	400	CFRP				Ø30.0	15.0	M8	16.0	Alu	415.0	400
ULR36200-E-00	36	200	ALU	anodized								200.0	400
ULR36400-E-00	36	400	ALU	anodized								400.0	400
ULR39130-E-01	39	130	ALU	hard-anodized	Ø16.0	28.0	Ø22.0	135.0	M8	20.0	St.	293.0	400
ULR39220-E-01	39	220	ALU	hard-anodized	Ø16.0	28.0	Ø22.0	81.0	M8	20.0	St.	329.0	400
ULR39320-E-01	39	320	ALU	hard-anodized	Ø16.0	28.0	Ø22.0	31.0	M8	20.0	St.	379.0	400
ULR44200-02	44	200	CFRP		Ø20.0	50.0	Ø29.6	10.0	M8	20.0	Alu	260.0	450
ULR44250-04	44	250	CFRP		M12	15.0	SW24	125.0			St.	390.0	550
ULR44250-11	44	250	CFRP		Ø18.0	45.0	Ø23.5	23.5	M8	20.0	Alu	318.5	700
ULR44250-12	44	250	CFRP	XP 0198	Ø18.0	45.0	Ø23.5	23.5	M8	20.0	Alu	318.5	700
ULR44300-02	44	300	CFRP		Ø20.0	50.0	Ø29.6	10.0	M8	20.0	Alu	360.0	450
ULR44400-05	44	400	CFRP		Ø18.0	45.0	Ø29.6	-1.5	M8	20.0	Alu	443.5	650
ULR44400-06	44	400	CFRP	XP 0198	Ø18.0	45.0	Ø29.6	-1.5	M8	20.0	Alu	443.5	650
ULR44400-08	44	400	CFRP		Ø18.0	43.5	Ø29.6	23.5	M8	20.0	Alu	443.5	450
ULR44400-09	44	400	CFRP	PC915S	Ø18.0	43.5	Ø29.6	23.5	M8	20.0	Alu	443.5	450
ULR60320-00**	60	320	CFRP		54.5	22.0			M12	22.0	Alu	342.0	700
ULR60440-01	60	440	CFRP	XP 0198	Ø29.0	85.0					Alu anodized	540.0	700
ULR60440-02	60	440	ALU	hard-anodized	Ø25.0	15.0	Ø35	120	M12	24.0	V2A	570.0	450
ULR60440-03	60	440	ALU	XP 0198	Ø25.0	15.0	Ø35	120	M12	24.0	V2A	570.0	450
ULR60440-04	60	440	ALU	hard-anodized	Ø29.0	85.0					Alu anodized	540.0	450

\*\* = Standard

**Saurer Technologies GmbH & Co. KG**  
**Engineered Bearing Solutions**

Fuldaer Str. 19  
97762 Hammelburg  
Germany  
T +49 9732 87 0  
F +49 9732 87 310  
sales.temco@saurer.com  
www.saurer.com